


# Dennice

Wymiary i waga

ASME B16.9

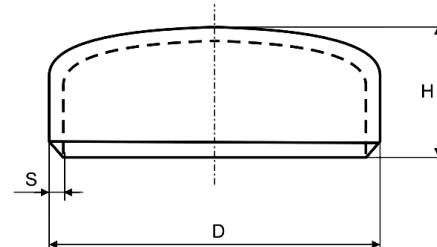

DN	Std XS XXS	Sch	D		s		H		waga teoretyczna kg/szt.
			mm	cale	mm	cale	mm	cale	
1/2"	Std		21,3	,840"	2,8	,109"	25,4	1"	0,032
	XS		21,3	,840"	3,7	,147"	25,4	1"	1,041
		160	21,3	,840"	4,8	,188"	25,4	1"	0,080
3/4"	Std		26,7	1,050"	2,9	,133"	25,4	1"	0,059
	XS		26,7	1,050"	3,9	,154"	25,4	1"	0,073
		160	26,7	1,050"	5,6	,219"	25,4	1"	0,120
1"	Std		33,4	1,315"	3,4	,133"	38,1	1.1/2"	0,100
	XS		33,4	1,315"	4,5	,179"	38,1	1.1/2"	0,130
		160	33,4	1,315"	6,4	,250"	38,1	1.1/2"	0,150
	XXS		33,4	1,315"	9,1	,358"	38,1	1.1/2"	0,204
1.14"	Std		42,2	1,660"	3,6	,140"	38,1	1.1/2"	0,140
	XS		42,2	1,660"	4,8	,191"	38,1	1.1/2"	0,180
1.1/2"	Std		48,3	1,900"	3,7	,145"	38,1	1.1/2"	0,170
	XS		48,3	1,900"	5,1	,200"	38,1	1.1/2"	0,220
		160	48,3	1,900"	7,1	,281"	38,1	1.1/2"	0,300
2"	Std		60,3	2,375"	3,9	,154"	38,1	1.1/2"	0,230
	XS		60,3	2,375"	5,5	,218"	38,1	1.1/2"	0,300
		160	60,3	2,375"	8,7	,344"	44,5	1.1/2"	0,599
	XXS		60,3	2,375"	11,1	,436"	44,5	1.1/2"	0,599
2.1/2"	Std		73	2,875"	5,2	,203"	38,1	1.1/2"	0,370
	XS		73	2,875"	7	,276"	38,1	1.1/2"	0,460
3"	Std		88,9	3,500"	5,5	,216"	50,8	2"	0,640
	XS		88,9	3,500"	7,6	,300"	50,8	2"	0,640
		160	88,9	3,500"	11,1	,438"	63,5	2.1/2"	1,450
	XXS		88,9	3,500"	15,2	,600"	63,5	2.1/2"	1,790
4"	Std		114,3	4,500"	6	,237"	63,5	2.1/2"	1,160
	XS		114,3	4,500"	8,6	,337"	63,5	2.1/2"	1,550
		160	114,3	4,500"	13,5	,531"	76,2	3"	2,750
	XXS		114,3	4,500"	17,1	,674"	76,2	3"	3,500
5"	Std		141,3	5,563"	6,6	,258"	76,2	3"	1,910
	XS		141,3	5,563"	9,5	,375"	76,2	3"	2,610
6"	Std		168,3	6,625"	7,1	,280"	88,9	3.1/2"	2,910
	XS		168,3	6,625"	11	,432"	101,6	3"	4,190
		160	168,3	6,625"	18,3	,719"	101,6	3"	7,500
	XXS		168,3	6,625"	21,9	,864"	101,6	3"	8,100