


Dennice

Wymiary i waga

ASME B16.9

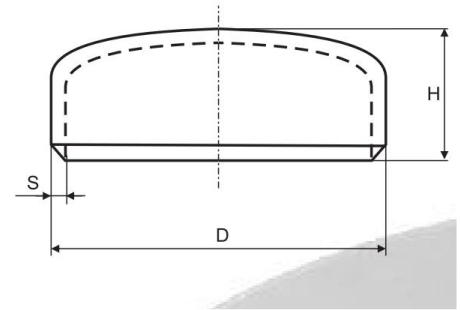

DN	Std XS XXS	Sch	D		s		H		waga teoretyczna kg/szt.
			mm	cale	mm	cale	mm	cale	
8"		20	219,1	8,625"	6,4	,250"	101,6	4"	4,500
		30	219,1	8,625"	7	,277"	101,6	4"	4,600
	Std		219,1	8,625"	8,2	,322"	101,6	4"	5,080
	XS		219,1	8,625"	12,7	,500"	101,6	4"	7,400
		160	219,1	8,625"	23,0	,906"	127	5"	15,45
10"		20	273	10,750"	6,4	,250"	127	5"	6,000
		30	273	10,750"	7,8	,307"	127	5"	7,800
	Std		273	10,750"	9,3	,365"	127	5"	9,080
	XS		273	10,750"	12,7	,500"	127	5"	11,900
		80	273	10,750"	15,1	,581"	152,4	6"	16,250
12"		20	323,9	12,750"	6,4	,250"	152,4	6"	10,000
		30	323,9	12,750"	8,4	,330"	152,4	6"	12,000
	Std		323,9	12,750"	9,5	,375"	152,4	6"	13,400
		40	323,9	12,750"	10,3	,406"	152,4	6"	19,000
	XS		323,9	12,750"	12,7	,500"	152,4	6"	17,300
		80	323,9	12,750"	17,5	,688"	177,8	7"	29,500
14"		20	355,6	14,000"	7,9	,312"	165,1	6.1/2"	14,000
	Std		355,6	14,000"	9,5	,375"	165,1	6.1/2"	16,100
		40	355,6	14,000"	11,1	,438"	165,1	6.1/2"	24,500
	XS		355,6	14,000"	12,7	,500"	165,1	6.1/2"	20,800
		80	355,6	14,000"	19	,750"	190,5	7.1/2"	33,000
16"		20	406,4	16,000"	7,9	,312"	177,8	7"	18,000
	Std		406,4	16,000"	9,5	,375"	177,8	7"	20,300
	XS		406,4	16,000"	12,7	,500"	177,8	7"	26,100
		80	406,4	16,000"	21,4	,844"	203,2	7"	52,250
18"	Std		457,2	18,000"	9,5	,375"	203,2	8"	25,900
	XS		457,2	18,000"	12,7	,500"	203,2	8"	33,900
		80	457,2	18,000"	23,8	,938"	228,6	9"	69,000
20"	Std		508	20,000"	9,5	,375"	228,6	9"	32,500
	XS		508	20,000"	12,7	,500"	228,6	9"	42,600
24"	Std		609,6	24,000"	9,5	,375"	266,7	10.1/2"	46,300
	XS		609,6	24,000"	12,7	,500"	266,7	10.1/2"	60,800