
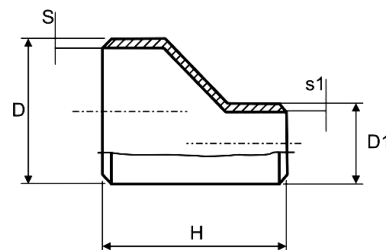


Redukcje koncentryczne/ekscentryczne

Wymiary i waga

ASME B16.9

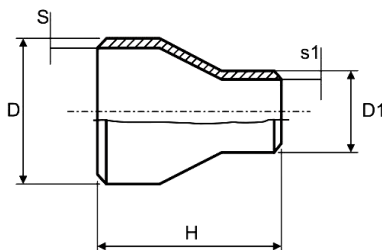

DN	Std XS XXS	Sch	D		s		D1		s1		H		waga teoretyczna kg/szt.
			mm	cale	mm	cale	mm	cale	mm	cale	mm	cale	
6"x5"	Std		168,3	6,625"	7,1	,280"	141,3	5,563"	6,6	,258"	139,7	5.1/2"	3,95
	XS				11	,432"			9,5	,375"	139,7	5.12"	5,94
		160			18,3	,719"			15,9	,625"	139,7	5.1/2"	10,0
8"x3"	Std		219,1	8,625"	8,2	,322"	88,9	3,500"	5,5	,216"	152,4	6"	6,49
	XS				12,7	,500"			7,6	,300"	152,4	6"	7,20
8"x4"	Std		219,1	8,625"	8,2	,322"	114,3	4,500"	6	,237"	152,4	6"	6,49
	XS				12,7	,500"			8,6	,337"	152,4	6"	9,84
	XXS				22,2	,875"			17,1	,674"	152,4	6"	14,5
		160			23,0	,906"			13,5	,531"	152,4	6"	16,5
8"x5"	Std		219,1	8,625"	8,2	,322"	141,3	5,563"	6,6	,258"	152,4	6"	6,49
	XS				12,7	,500"			9,5	,375"	152,4	6"	9,84
8"x6"	Std		219,1	8,625"	8,2	,322"	168,3	6,625"	7,1	,280"	152,4	6"	6,49
	XS				12,7	,500"			11	,432"	152,4	6"	9,84
		160			23,0	,906"			18,3	,719"	152,4	6"	16,5
	XXS				22,2	,875"			21,9	,864"	152,4	6"	14,5
10"x4"	Std		273	10,750"	9,3	,365"	114,3	4,500"	6	,237"	177,8	7"	10,7
	XS				12,7	,500"			8,6	,337"	177,8	7"	11,8
10"x5"	Std		273	10,750"	9,3	,365"	141,3	5,563"	6,6	,258"	177,8	7"	9,5
	XS				12,7	,500"			9,5	,375"	177,8	7"	12,7
10"x6"	Std		273	10,750"	9,3	,365"	168,3	6,625"	7,1	,280"	177,8	7"	1,7
	XS				12,7	,500"			11	,432"	177,8	7"	14,5
		80			15,1	,593"			11	,432"	177,8	7"	16,3
10"x8"		20	273	10,750"	6,4	,250"	219,1	8,625"	6,4	,250"	177,8	7"	7,89
		30			7,8	,307"			7	,277"	177,8	7"	9,50
	Std		273		9,3	,365"			8,2	,322"	177,8	7"	10,7
	XS				12,7	,500"			12,7	,500"	177,8	7"	14,5
		80			15,1	,594"			12,7	,500"	177,8	7"	17,8
		120			21,4	,844"			18,3	,719"	177,8	7"	24,5
		160			28,6	1,125"			23,0	,906"	177,8	7"	32,5
12"x6"	Std		323,9	12,750"	9,5	,375"	168,3	6,625"	7,1	,280"	203,2	8"	15,0
		40			10,3	,406"			7,1	,280"	203,2	8"	16,4
	XS				12,7	,500"			11,0	,432"	203,2	8"	18,1
		80			17,5	,688"			11,0	,432"	203,2	8"	28,2
		160			33,3	1,312"			18,3	,719"	203,2	8"	49,4