


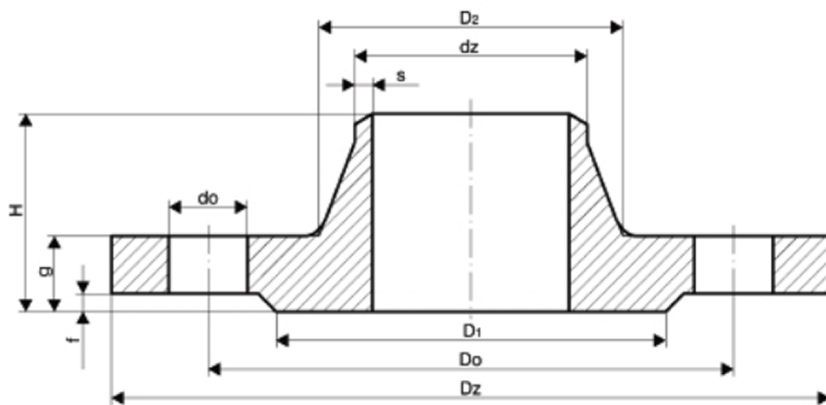

Kołnierz z szyjką wg DIN 2632

Ci nienie norśalne PN 10															
Śred. nom. DN	Rura	Kołnierz												Śruby	
	dz	Dz	Do	do	H	g	D ₂	h	R	s*	Przylga		Masa kg	n	gwint
											D ₁	f			
10	14	Dla kołnierzy DN 10 – DN 175 obowiązują wymiary jak dla ciśnienia PN 16 wg DIN 2633													
	17,2														
15	20														
	21,3														
20	25														
	26,9														
25	30														
	33,7														
32	38														
	42,4														
40	44,5														
	48,3														
50	57														
	60,3														
65	76,1														
80	88,9														
100	108														
	114,3														
125	133														
	139,7														
150	159														
	168,3														
175	193,7														
200	219,1	340	295	22	62	24	235	16	10	5,9	268	3	11,3	8	M20
250	273	395	350	22	68	26	292	16	12	6,3	320	3	14,7	12	M20
300	323,9	445	400	22	68	26	344	16	12	7,1	370	4	17,4	12	M20
350	355,6	505	460	22	68	26	385	16	12	7,1	430	4	23,6	16	M20
400	406,4	565	515	26	72	26	440	16	12	7,1	482	4	28,6	16	M24
500	508	670	620	26	75	28	542	16	12	7,1	585	4	38,1	20	M24
600	610	780	725	30	80	28	642	18	12	7,1	685	5	44,6	20	M27
700	711	895	840	30	80	30	745	18	12	8	800	5	62,4	24	M27
800	813	1015	950	33	90	32	850	18	12	8	905	5	84,1	24	M30
900	914	1115	1050	33	95	34	950	20	12	10	1005	5	98,5	28	M30
1000	1016	1230	1160	36	95	34	1052	20	16	10	1110	5	115	28	M33
1200	1220	1455	1380	39	115	38	1255	25	16	11	1330	5	182	32	M36
1400	1420	1675	1590	42	120	42	1460	25	16	12	1535	5	248	36	M39