


Trójniki redukcyjne

Wymiary i waga

ASME B16.9

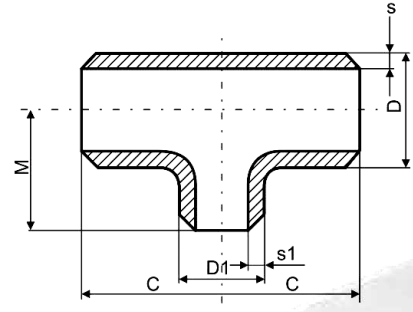

DN	Std XS XXS	Sch	D		s		D1		s1		C		M		waga teoretyczna kg/szt.
			mm	cale	mm	cale	mm	cale	mm	cale	mm	cale	mm	cale	
3/4"x1/2"	XS		26,7	1,050"	3,9	,145"	21,3	,840"	3,7	,147"	28,4	1.1/8"	28,4	1.1/8"	0,209
		160			5,6	,219"			4,8	,188"	28,4	1.1/8"	28,4	1.1/8"	0,270
1"x1/2"	Std		33,4	1,315"	3,4	,133"	21,3	,840"	2,8	,109"	38,1	1.1/2"	38,1	1.1/2"	0,33
	XS				4,5	,179"			3,7	,147"	38,1	1.1/2"	38,1	1.1/2"	0,40
					6,4	,250"			4,8	,188"	38,1	1.1/2"	38,1	1.1/2"	0,47
1"x3/4"	XS		33,4	1,315"	4,5	,179"	26,7	1,050"	3,9	,154"	38,1	1.1/2"	38,1	1.1/2"	0,42
		160			6,4	,250"			5,6	,219"	38,1	1.1/2"	38,1	1.1/2"	0,47
1.1/4"x3/4"	Std		42,2	1,660"	3,6	,140"	26,7	1,050"	2,9	,113"	47,8	1.7/8"	47,8	1.7/8"	0,63
1.1/2"x1/2"	Std		48,3	1,900"	3,7	,145"	21,3	,840"	2,8	,109"	57,2	2.1/4"	57,2	2.1/4"	0,91
	XS				5,1	,200"			3,7	,147"	57,2	2.1/4"	57,2	2.1/4"	1,90
1.1/2"x3/4"	Std		48,3	1,900"	3,7	,145"	26,7	1,050"	2,9	,113"	57,2	2.1/4"	57,2	2.1/4"	0,95
	XS				5,1	,200"			3,9	,154"	57,2	2.1/4"	57,2	2.1/4"	1,09
		160			7,1	,281"			5,6	,219"	57,2	2.1/4"	57,2	2.1/4"	1,79
1.1/2"x1"	Std		48,3	1,900"	3,7	,145"	33,4	1,315"	3,4	,133"	57,2	2.1/4"	57,2	2.1/4"	0,95
	XS				5,1	,200"			4,5	,179"	57,2	2.1/4"	57,2	2.1/4"	1,13
		160			7,1	,281"			6,4	,250"	57,2	2.1/4"	57,2	2.1/4"	1,79
2"x3/4"	Std		60,3	2,375"	3,9	,145"	26,7	1,050"	2,9	,113"	63,5	2.1/2"	50,8	2"	1,70
	XS				5,5	,218"			3,9	,154"	63,5	2.1/2"	50,8	2"	1,70
2"x1"	Std		60,3	2,375"	3,9	,154"	33,4	1,315"	3,4	,133"	63,5	2.1/2"	50,8	2"	1,89
	XS				5,5	,218"			4,5	,179"	63,5	2.1/2"	50,8	2"	1,87
		160			8,7	,344"			6,4	,250"	63,5	2.1/2"	50,8	2"	3,18
2"x1.1/4"	Std		60,3	2,375"	3,9	,154"	42,2	1,660"	3,6	,140"	63,5	2.1/2"	57,2	2.1/4"	1,70
	XS				5,5	,218"			4,9	,191"	63,5	2.1/2"	57,2	2.1/4"	1,70
2"x1.1/2"	Std		60,3	2,375"	3,9	,154"	48,3	1,900"	3,7	,145"	63,5	2.1/2"	60,3	2.3/8"	1,32
	XS				5,5	,218"			5,1	,200"	63,5	2.1/2"	60,3	2.3/8"	1,59
		160			8,7	,344"			7,1	,281"	63,5	3"	60,3	2.3/8"	2,5
2.1/2"x1.1/4"	Std		73	2,875"	5,2	,203"	42,2	1,660"	3,6	,140"	76,2	3"	63,5	2.1/2"	2,00
2.1/2"x1.1/2"	Std		73	2,875"	5,2	,203"	48,3	1,900"	3,7	,145"	76,2	3"	66,5	2.3/4"	2,70
	XS				7,0	,276"			5,1	,200"	76,2	3"	66,5	2.3/4"	2,70
2.1/2"x2"	Std		73	2,875"	5,2	,203"	60,3	2,375"	3,9	,154"	76,2	3"	69,9	2.3/4"	2,27
	XS				7,0	,276"			5,5	,218"	76,2	3"	69,9	2.3/4"	2,81