


Redukcje koncentryczne/ekscentryczne

Wymiary i waga

ASME B16.9

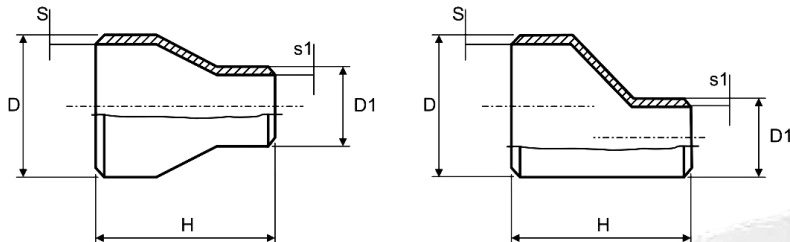

DN	Std XS XXS	Sch	D		s		D1		s1		H		waga teoretyczna kg/szt.		
			mm	cale	mm	cale	mm	cale	mm	cale	mm	cale			
12"x8"		20	323,9	12,750"	6,4	,250"	219,1	8,625"	6,4	,250"	203,2	8"	10,7		
		30			8,4	,330"			7	,227"	203,2	8"	12,6		
	Std				9,5	,375"			8,2	,322"	203,2	8"	15,0		
		40				10,3	,406"			8,2	,322"	203,2	8"	16,4	
	XS					12,7	,500"			12,7	,500"	203,2	8"	19,8	
		80					17,5	,668"			12,7	,500"	203,2	8"	28,2
		160					33,3	1,312"			23,0	,906"	203,2	8"	51,4
12"x10"		20	323,9	12,750"	6,4	,250"	273	10,750"	6,4	,250"	203,2	8"	11,1		
		30				8,4	,330"			7,8	,307"	203,2	8"	13,2	
	Std					9,5	,375"			9,3	,365"	203,2	8"	15,0	
		40					10,3	,406"			9,3	,265"	203,2	8"	16,4
		80					17,5	,688"			15,1	,594"	203,2	8"	28,2
	XS						12,7	,500"			12,7	,500"	203,2	8"	19,8
		160					33,3	1,312"			28,6	1,125"	203,2	8"	53,3
14"x6"	Std		355,6	14,000"	9,5	,375"	168,3	6,625"	7,1	,280"	330,2	13"	25,4		
	XS					12,7	,500"			11	,432"	330,2	13"	35,6	
14"x8"		20	355,6	14,000"	7,9	,312"	219,1	8,625"	6,4	,250"	330,2	13"	23,1		
	Std					9,5	,375"			8,2	,322"	330,2	13"	26,8	
	XS					12,7	,500"			12,7	,500"	330,2	13"	34,9	
		80					19,0	,750"			12,7	,500"	330,2	13"	52,3
14"x10"		20	355,6	14,000"	7,9	,312"	273	10,750"	6,4	,250"	330,2	13"	24,21		
		30				9,5	,375"			7,8	,307"	330,2	13"	26,85	
	Std					9,5	,375"			9,3	,365"	330,2	13"	26,8	
	XS					12,7	,500"			12,7	,500"	330,2	13"	36,3	
		80					19,0	,750"			15,1	,594"	330,2	13"	52,3
14"x12"		20	355,6	14,000"	7,9	,312"	323,9	12,750"	6,4	,250"	330,2	13"	25,56		
		30				9,5	,375"			8,4	,330"	330,2	13"	26,85	
	Std					9,5	,375"			9,5	,375"	330,2	13"	26,8	
		40					11,1	,438"			10,3	,406"	330,2	13"	31,3
	XS					12,7	,500"			12,7	,500"	330,2	13"	35,5	
		80					19,0	,750"			17,5	,688"	330,2	13"	59,47
16"x8"	Std		406,4	16,000"	9,5	,375"	219,1	8,625"	8,2	,322"	355,6	14"	33,1		
	XS					12,7	,500"			12,7	,500"	355,6	14"	44,0	
16"x10"		20	406,4	16,000"	7,9	,312"	273	10,750"	6,4	,250"	355,6	14"	28,83		
	Std					9,5	,375"			9,3	,365"	355,6	14"	33,1	
	XS					12,7	,500"			12,7	,500"	355,6	14"	44,0	
		40					12,7	,500"			9,3	,365"	355,6	14"	44,0
		80					21,4	,844"			15,1	,594"	355,6	14"	73,5